





esigned for the rigors of marine use, the CR Series provides built-in refrigerators for every application. Each unit includes a flush-mount frame that will compliment any on-board galley or cockpit.

High-tech design: Each CR Series appliance is equipped with a premium Danfoss DC compressor, providing excellent cooling performance, minimal power consumption when operating on either DC or AC power, and superbly quiet operation.



Patented Double-Lock Door Mechanism:

During rough sea conditions, the refrigerator door remains securely closed, at the top and bottom, as a result of the patented double-lock door mechanism. It also incorporates the "vent" position, which holds the door slightly open when the refrigerator is not in use for easy defrosting and to prevent mildew.

AWARD WINNING DESIGN



"Beyond pleasing aesthetics, the new CR Series compressor refrigerators offer several clever design touches, including a lock to allow the cabinet to ventilate when not in use and a very positive latching mechanism."

As commented by the awards jury at METS Amsterdam—the world's leading trade show for marine equipment.

Front Loading Refrigerators

CR SERIES

Luxury Meets Performance and Top-of-the-Line Technology

Premium front loading refrigerators with freezer compartments


- Totally encapsulated freezer compartment eliminates the risk of ice-pick damage.
- Diagnostic troubleshooting indicator lights.
- Separate insulated freezer compartment with door.
- Door with double-lock (top/bottom) and dual function (locking/ventilation).
- Full-length recessed door handle provides comfortable opening and closing.
- Door with magnetic sealing gasket.
- Cool-blue interior light.
- Door hinge and locks (right/left) allows for reversible door opening. Left or right — the choice is yours.
- Interchangeable face panel to match decor.
- Flush mount flange provides a pleasing cosmetic appearance and eliminates protruding handle or locks. Space-saving flange is available as an option, when cabinet depth is limited.

QUALITY FEATURES







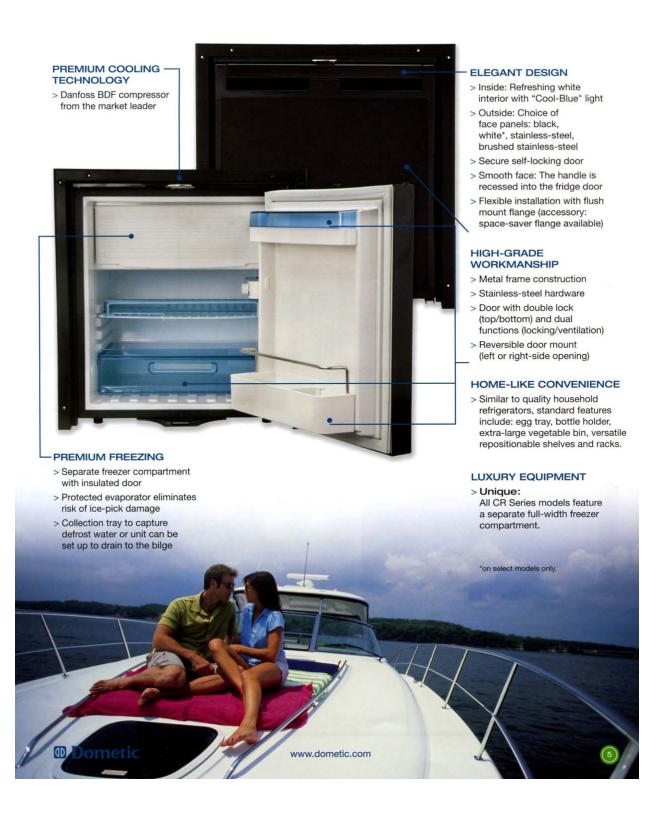



Quality Features



Exclusive, protected evaporator eliminates the risk of ice-pick damage.



Collection tray captures defrost water or can be configured to drain to the bilge.







Cool-blue contemporary interior light. Diagnostic circuitry installed with green and red LED indicator lights.





Patented double-lock door mechanism securely closes door at the top and bottom.





"Computer style" AC socket enables easy-to-change-to-overseas cord and plugs.



■ Face panel is interchangeable—even while installed in the boat.



CR-1080ST-SS Shown without flange.







Gross Capacity:	2.8 cubic feet, (79.1 liters), 4.8 quarts (4.5 liters) in the freezer compartment	
Voltage:	12/24 volts DC, 110/220 volts AC	
Average Power Consumption:	40 watts / 3.3 amps	
Insulation:	CFC-free polyurethane	
Compressor:	Danfoss BD35F	
Refrigerant:	Environmentally-safe R134a	
Material:	Stainless-steel fittings, plastic interior, door frame in plastic body with coated metal frame	
Color Options:	CR-1080U/F: black face panel, black door surround, black flush mount flange; CR-1080E/F-SS: stainless-steel face panel, silver door surround, silver flush mount flange CR-1080ST/F-SS: brushed stainless-steel face panel, bright silver door surround, bright stainless-steel flush mount flange	
Cut-Out Dimensions:	19.7 W x 25"H x 20.6"D (flush mount flange) 500mm x 635mm x 523mm 18.8"W x 25"H x 18.7"D (space-saver flange) 477mm x 635mm x 474mm	
Net Weight:	52 lbs. / 23 kg.	
Flange Options:	EST-0080U: black space-saver EST-0080E: silver space-saver EST-0080ST: stainless-steel space-save	
Replacement Flange:	EFM-0080U: black flush mount EFM-0080E: silver flush mount EFM-0080ST: stainless-steel flush mount	

CR-1110	10			
Gross Capacity:	3.8 cubic feet, (79.1 liters), 8.9 quarts (8.4 liters) in the freezer compartment			
Voltage:	12/24 volts DC, 110/220 volts AC			
Average Power Consumption:	45 watts / 3.75 amps			
Insulation:	CFC-free polyurethane			
Compressor:	Danfoss BD35F			
Refrigerant:	Environmentally-safe R134a			
Material:	Stainless-steel fittings, plastic interior, doo frame in plastic body with coated metal fra			
Color Options:	CR-1110U/F: black face panel, black door surround, black flush mount flange; CR-1110E/F-SS: stainless-steel face panel, silver door surround, silver flush mount flange CR-1110ST/F-SS: brushed stainless-steel face panel, bright silver door surround, bright stainless-steel flush mount flange			
Cut-Out Dimensions:	21.5"W x 29"H x 21.7"D (flush mount flange) 546mm x 736mm x 551mm 20.6"W x 29"H x 19.9"D (space-saver flange 523mm x 739mm x 505mm			
Net Weight:	62 lbs. / 28 kg.			
Flange Options:	EST-0110U: black space-saver EST-0110E: silver space-saver EST-0110ST: stainless-steel space-saver			
Replacement Flange:	EFM-0110U: black flush mount EFM-0110E: silver flush mount EFM-0110ST: stainless-steel flush mount			









TJ42RE-SS Refrigerator



TJF42-SS Full Size Freeze

ometic's TJ Series of refrigerators and freezers are now available with a stainless-steel finish. These state-of-the-art units are designed to replace existing refrigerators and give your galley a more modern look.

Rugged Door Latch and Shelving Systems:

All models offer a number of refinements and improvements in the door and latch assembly. The doors and shelving systems are exceptionally strong. The latch system has been designed to withstand extraordinary rough treatment and to resist accidental opening. When heavily-weighted with beverages, the latch keeps the door securely closed, even in severe conditions. The moveable shelves are locked in place and will not budge under rough seaways.

APPROVED
All models are UL, CSA, and CE Approved.

Front Loading Refrigerators

TJ SERIES

Unparalleled Reputation for Long-Lasting Performance

Premium front loading refrigerators with freezer compartments

- Freezer compartment with door.
- Adjustable locking shelves for efficient use of interior space and safety underway.
- New, stronger refrigerator latch system.
- Door with magnetic sealing gasket.
- Bright interior light.
- Stainless-steel available on all models.
- Flush mount flange provides a pleasing cosmetic appearance and eliminates protruding handle or locks. TJ18S has a non-flush flange.
- All models are UL / CSA / and CE approved.

QUALITY FEATURES









TJ18, TJ18S			
Gross Capacity:	1.8 cubic feet (51 liters), 4.8 quarts (4.5 liters) in the freezer compartment		
Voltage:	12/24 volts DC Optional 115/230 volts AC, add "AC" to part #		
Average Power Consumption:	40 watts / 3.3 amps		
Insulation:	CFC-free polyurethane		
Compressor:	Danfoss BD35F		
Refrigerant:	Environmentally-safe R134a		
Material:	Stainless-steel fittings, plastic interior, door frame in plastic body with coated metal frame		
Color Options:	TJ18-SS: stainless-steel (flush mount flange) TJ18S-SS: stainless-steel (non-flush flange) TJ18: black (flush mount flange) TJ18S: black (non-flush flange)		
Cut-Out	15.75"W x 21.06"H x 19.75"D (flush mount flange 400mm x 535mm x 502mm		
Dimensions:	15.625"W x 20.563"H x 18.25"D (non-flush) 397mm x 523mm x 464mm		
Net Weight:	40 lbs. / 18.14 kg.		
Option:	Space-saving flange: #TJ18S-SS		

TJ22		
Gross Capacity:	2.2 cubic feet (63 liters), 4.8 quarts (4.5 liters) in the freezer compartment	
Voltage:	12/24 volts DC Optional 115/230 volts, add "AC" to part #	
Average Power Consumption:	40 watts / 3.3 amps	
Insulation:	CFC-free polyurethane	
Compressor:	Danfoss BD35F	
Refrigerant:	Environmentally-safe R134a	
Material:	Stainless-steel fittings, plastic interior, door frame in plastic body with coated metal frame	
Color Options:	TJ22-SS: stainless-steel TJ22: black	
Cut-Out Dimensions:	18.31"W x 21.06"H x 21"D (flush mount flange) 466mm x 535mm x 534mm	
Net Weight:	46 lbs. / 20.87 kg.	



TJ42RE-SS. Full size refrigerator.

TJ42	
Gross Capacity:	4.2 cubic feet (119 liters), 8.9 quarts (8.4 liters) in the freezer compartment
Voltage:	12/24 volts DC Optional 115/230 volts, add "AC" to part #
Average Power Consumption:	45 watts / 3.75 amps
Insulation:	CFC-free polyurethane
Compressor:	Danfoss BD35F
Refrigerant:	Environmentally-safe R134a
Material:	Stainless-steel fittings, plastic interior, door frame in plastic body with coated metal frame
Color Options:	TJ42-SS: stainless-steel refrigerator with freezer TJ42: black refrigerator with freezer TJ42RE-SS: stainless-steel refrigerator only TJ42RE: black refrigerator only TJF42-SS: stainless-steel freezer only TJF42: black freezer only

Available as a right hand opening door as an AC/DC model. Specify "RT". Example: TJ42AC-RT. "RE" is refrigerator only. Use TJ42RE side-by-side with TJF42.

69 lbs. / 31.30 kg.

21.37"W x 30.625"H x 21.5"D (flush mount flange) 543mm x 778mm x 548mm

1	•••	
3		
	*	
300000		
	TIDEAC CC	
	TJ85AC-SS	

TJ85AC		
Gross Capacity:	8.5 cubic feet (241 liters), 1.6 cubic feet (45 liters) in the freezer compartment	
Voltage:	12/24 volts DC, 115/230 volts	
Average Power Consumption:	65 watts / 5.4 amps	
Insulation:	CFC-free polyurethane	
Compressor:	Danfoss BD35F	
Refrigerant:	Environmentally-safe R134a	
Material:	Stainless-steel fittings, plastic interior, door frame in plastic body with coated metal fram	
Color Options:	TJ85AC: black TJ85AC-SS: stainless-steel	
Cut-Out Dimensions:	23.5"W x 53"H x 23.81"D (flush mount flange 599mm x 1347mm x 605mm	
Net Weight:	112 lbs. / 50.80 kg	

Available as a right hand opening door. Specify "RT". Example: TJ85AC-RT. Light in freezer is photographer's effect only. Equipped with light in refrigerator.



Cut-Out Dimensions:

Net Weight: