


Masterlink MICC

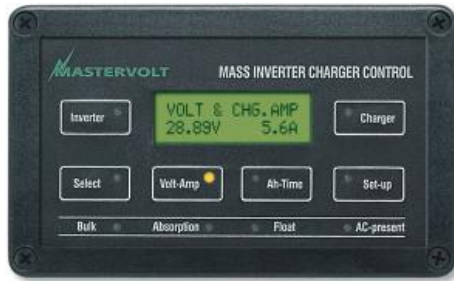

- Comprehensive remote control for inverter Mass and battery charger or Combi Mass
- With LCD readout and LED bar
- Shunt for precise measuring
- Easy installation
- Including protective black box

PN 70403105

Specifications

Application

Battery consumption meter (12/24V DC) with LCD readout. Remote control for inverter Mass and battery charger or Combi Mass

TECHNICAL SPECIFICATIONS

Number of battery sets	service (fully) & starter (voltage)
Max. Amp-hour capacity	9999 Ah
Readout voltage	yes
Readout current	yes
Readout Amp-hours	yes
Time remaining indication	yes
Battery capacity in %	yes
Extra LED indication	battery capacity in %, charge status battery charger
Inverter operation	yes
Battery charger operation	yes
'Power Sharing' adjustment	yes
Compatible with MasterVision	yes
Current consumption (sleep mode)	28mA/12V - 26mA/24V
Current consumption (operation)	100mA/12V - 50mA/24V
Supply voltage	9-35V DC

Voltage range measurement	7-35V DC
Voltage resolution	0.05V
Voltage deviation	$\pm 0.6\% \pm 1$ figure
Amps measurement range	500A
Shunt specification	500A/50mV (service set)
Dimensions instrument (W x H)	120 x 65 mm
Built-in depth incl./excl. cover box	55 mm/40 mm
Weight instrument (incl. shunt)	0.9 kg
Dimensions shunt (HxWxD)	84 x 44 x 44 mm - M8
Battery alarm contact	yes (potential free)
Connection cable (8-wire) necessary	yes (art.nr. 6801601200)
Modular cable necessary	yes (2 pieces)