

Freezers

Features


- 6 Front load sizes to choose from 1.9 cu.ft to 5.8 cu.ft. (54 liters up to 162 liters)
- 1 Top load unit 2.5 cu.ft (71 liters)
- Efficient 12/24 VDC Danfoss BD series compressor using environmentally friendly refrigerant R134a
- Efficient, quiet and reliable static condenser
- Adjustable low voltage protection to prevent complete battery discharge
- Rugged 18 gauge epoxy (coated satin coat) steel frame which is by far the strongest in the industry
- No spill ice cube tray
- Solid polyurethane foamed cabinets & doors
- Easy to clean polystyrene interior
- Galvanized steel outer cabinet shell
- Available DC only 12/24 vdc, or AC/DC 12/24 vdc and 100-240 vac 50/60 Hz
- All freezers run at 4.4 amps on 12 VDC with the exception of the F5810 which has a running amperage of 5.5amps



TL2500



F2300

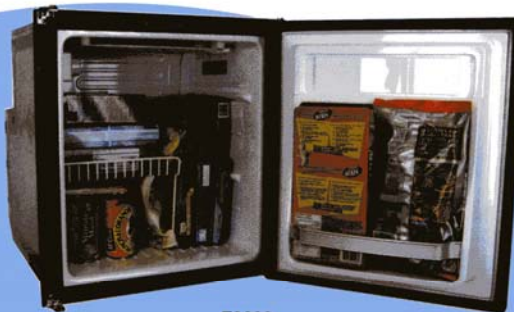

F2600



F3800



F5810

F5810 has a brushed stainless steel flush mounting flange.



F1900



FRAME 704

Flange Kits for the R3800 & R4500 provide a way of converting these units to fit directly into the existing cabinetry of an older competitive cut out of 32 7/8" H x 22" W without expensive and time consuming cabinetry modifications.

Kit includes:

- 2 Side brackets
- Top & Bottom ventilation grills
- Base to support unit
- Screws & instructions for assembly

FRAME 704

Cut out:
32 7/8" H x 22" W
Flange Dimensions:
33 1/2" H x 22 7/8" W

FLUSH FLANGE 61 65

This kit fits the RS and RFS61 00 & 6500. It allows the units to be flush mounted, the cut out will increase to 38" W x 29 1/2" H. It will also add 2 3/4" to the depth dimension of your unit.

NOMENCLATURE :

W	RFS	75 0 1	ACDC
W- white frame /Door extrusion Blank-black frame / Door extrusion	R - refrigerator F - freezer RS - refrigerator side x side RFS - refrigerator / freezer side x side RFU - refrigerator / freezer upright TL - top load	CABINET SIZE	DC - 12 / 24 VDC ACDC - 12-24 / 100-240V 50/60 hz
	O - Standard mounting flange 1 - Flush mounting flange		OPTIONS: 0 - FREEZER ON RIGHT or STANDARD UNIT 1 - FREEZER ON LEFT REFRIGERATOR ON RIGHT 2 - NO FREEZER COMPARTMENT (SINGLE DOOR) 3 - BASE UP (compressor base mount up. special request) 4 - mounting frame w / hooks 5 - White with raised vacuum formed abs panel 6 / 7 / 8 - to be determined 9 - non standard order (check options)

Freezers

Model	Interior Volume		Cut-out dimensions		Flange dimensions		Panel size up to 1/4" thick		Net weight	Standard Features	Available Options	
	cu ft	cu ltrs	in.	mm	in.	mm	in.	mm				
F1900	1.9	54	H	20 1/2	521	21 3/8	543	20 3/16	512	38		
			W	15 5/8	391	16 1/8	410	14 7/8	384			
			D	17 3/4	451							
F2300	2.1	59	H	28 3/8	721	29 3/8	747	28	711	49		
			W	16 3/4	425	17 3/4	451	16 9/16	421			
			D	14	356							
F2600	2.4	68	H	20 1/4	514	21	533	20 3/16	513	43		
			W	18	457	18 3/4	476	17 5/16	440			
			D	19 1/2	495							
F3800	3.5	100	H	28 3/8	721	29 3/8	747	28	711	58		
			W	20 1/4	514	21	533	19 5/8	499			
			D	18	457							
New F5810	5.8	162	H	31 3/4	793	33 1/8	841	29 5/8	752	79		
			W	23 1/8	575	23 1/8	629	21 3/8	543			
			D	23 3/4	594							
TL2500	2.5	71	L	20 1/4	514	21	533	20 3/16	513	65		
			W	18	457	18 3/4	476	17 5/16	440			
			D	27	686							