

Two Door Undercounter Refrigerators and Refrigerator/Freezers

Features


- 8 models to choose from; 4.2 cu.ft to 7.5 cu.ft (119 liters up to 212 liters)
- Efficient 12/24 VDC Danfoss BD series compressor using environmentally friendly RB49 refrigerant
- Efficient, quiet and reliable static condenser
- Adjustable low voltage protection to prevent complete battery discharge
- Rugged 18 gauge epoxy (coated satin coat) steel frame which is by far the strongest in the industry
- No spill ice cube tray
- Standard freezer compartments (all with doors)
- Solid polyurethane foamed cabinets & doors
- Easy to clean polystyrene interior
- Galvanized steel outer cabinet shell
- Available in DC only, 12 & 24 VDC, or ACDC 12 & 24 VDC and 100-240 vac 50/60hz
- All two door side x side units run at 4.4 amps on 12 VDC



RS6100



RS7600

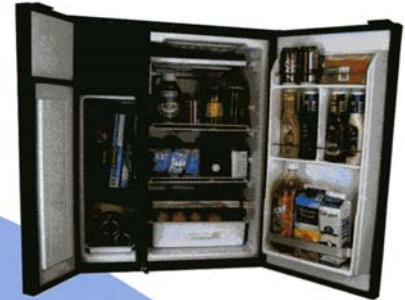

RFS7501



RFS6100 / RFS6500



RS4600

- * RFS --01 models have freezer on left
- * RFS --00 models have freezer on right

Flush mounting frame for RS6100, RFS6100 & RFS6500 on page 7.

Model	Interior Volume		Freezer Volume		cut-out dimensions		Flange dimensions		Panel 1 size up to 1/4" thick		Panel 2 size up to 1/4" thick		Net weight lbs.	Standard Features	Available Options
	cu ft	ltrs	cu ft	ltrs	in.	mm	in.	mm	in.	mm	in.	mm			
RS4600	4.2	119	2x0.25	2x7.1	H 28 3/8 W 34 3/8 D 14	721 873 356	29 3/8 35 1/2	747 902	28 16 9/16	711 421	28 16 9/16	708 421	90		
RS6100	5.6	159	0.25	7.1	H 28 3/8 W 37 7/8 D 16 1/2	721 962 419	29 3/8 38 7/8	747 988	28 16 9/16	711 421	28 19 5/8	711 499	82		
RS7600	7	198	2x0.40	2x11.3	H 28 3/8 W 41 1/4 D 18 1/2	721 1048 470	29 3/8 42	747 1067	28 19 5/8	711 499	28 19 5/8	711 499	93		
RFS6100 RFS6101*	5.6	159	2.1	59	H 28 3/8 W 37 7/8 D 16 1/2	721 962 419	29 3/8 38 7/8	747 988	28 16 9/16	711 421	28 19 5/8	711 499	86		
RFS6500 RFS6501*	6.4	181	2.1	59	H 28 3/8 W 37 7/8 D 19 1/4	721 962 489	29 3/8 38 7/8	747 988	27 7/8 16 9/16	711 421	28 19 5/8	711 499	86		
RFS7501	7.5	212	2	57	H 34 W 28 D 23	864 711 584	35 29	889 737	33 3/4 17 7/8	857 454	33 3/4 9 5/16	857 236	90		